

Changes for the Better

 **MITSUBISHI
ELECTRIC**
AIR CONDITIONERS

JS
Series



**STRONG ON COOLING
BIG ON SAVINGS**



mitsubishi electric

Advanced ME Inverter Technology

Mitsubishi Electric leverages its **cutting-edge production technologies** to manufacture world-class products in its **state-of-the-art assembly lines** ensuring complete peace of mind for its customers across the globe.

Capitalizing on our **century-old experience and expertise** in understanding customer needs, we manufacture our own key components like **Inverter Power Module, Compressors, Propeller Fan, DC Motors, etc.** Our **advanced inverter technologies** have enabled us to achieve powerful and desired cooling comfort without compromising on **energy efficiency**.



MITSUBISHI ELECTRIC Inverter Power Module

The Inverter Power Module is the brain of the air conditioner. It minimizes power consumption by adjusting the frequency.



MITSUBISHI ELECTRIC Compressor

The compressor is the heart of the air conditioner. Employing Mitsubishi Electric's proprietary technology, we are able to achieve both high efficiency and high power.

MITSUBISHI ELECTRIC Propeller Fan and DC Fan Motor

| Propeller Fan



Newly designed propeller fan maximizes airflow efficiency. It delivers the most air volume with the least noise.

| DC Fan Motor



A highly efficient DC Fan motor drives the fan of the outdoor unit. Efficiency is much higher than an equivalent AC motor.



| Poki-Poki Motor



Dramatically enhanced motor efficiency utilising original dense winding technology.

| Heat Caulking



Original heat caulking method minimizes cylinder distortion for even greater efficiency.



Fast Cooling

Mitsubishi Electric, a global leader in air conditioning, understands its customer requirement better than anyone else.

At Mitsubishi Electric, we invest great care in designing our product features. Instant relief from scorching heat is one such desire met successfully through the Fast Cooling feature in our air conditioners provided just at the click of a button.



01 Fast Cooling button


Once activated, this mode continues for 15 minutes.



Fast Cooling mode starts immediately with the push of a button. According to preference, air direction can be changed freely.

02 Thermography

[Normal] [Fast Cooling]

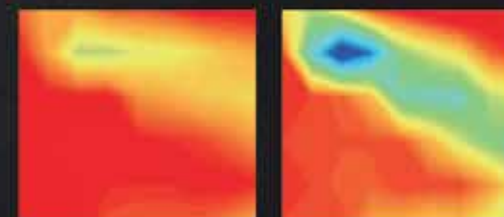


Warmer

Cooler


Quickly cools the room with the highest-volume and low-temperature airflow at 2 min. after operation

03 Compressor Frequency Image

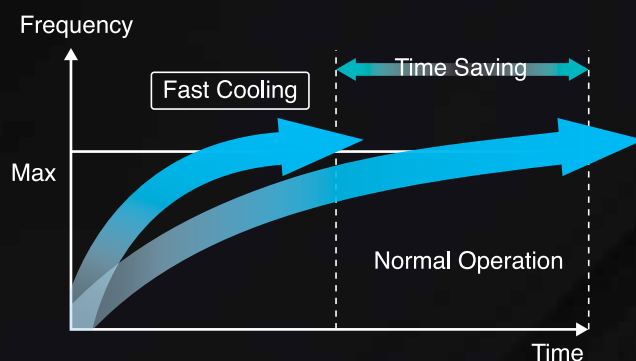

Pressing the Fast Cooling button makes the compressor reach its maximum frequency remarkably faster than in Normal Operation.

04 Air Outlet Temperature

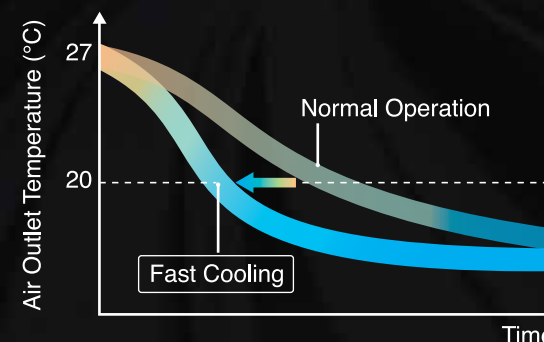

Lowens the air outlet temperature faster than Inverter Normal Operation.


Micro Particle Catching Filter (PM 2.5) and High Density Filter

Effectively eliminates floating PM2.5 and smaller dust particles.



01 Micro Particle Catching Filter¹

Effectively catches floating PM 2.5 particles to maintain clean air in the room.

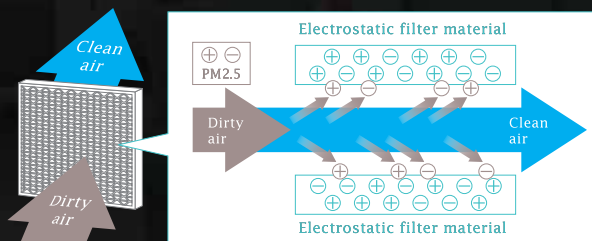

Electrostatic material removes PM 2.5 from the air and absorbs it when passing through the filter.



Model name:
MAC- EMF 515 FT-E


02 High Density Filter¹

High Density Filter can prevent smaller dust particles from entering inside air conditioners

Comparison of density of filters



Standard Filter



High Density Filter
(Optional parts)

Model name:
MAC- HDJ 519 FT-E | MAC- HDH 519 FT-E

¹(Optional parts)

Long Airflow

Delivers substantial and comfortable airflow

Delivers Long and comfortable airflow upto 12m¹ suitable for living rooms



¹Available in MSY-JS18/22



MITSUBISHI ELECTRIC launched the World's First* Room Air Conditioner equipped with Cross-Flow Fan in 1968.

*Based on Euromonitor International Research

Cross-Flow Fan Technology



Our unique Cross-Flow Fan construction guides air smoothly along each rotating wing as it simultaneously intakes and expels air. This allows for highly efficient delivery of powerful and refreshing airflow.




Dual Barrier Coating

Dual Barrier Coating prevents dust and greasy dirt from getting into the air conditioner*



State-of-the-art coating technology

Dual Barrier Coating both types of dirt

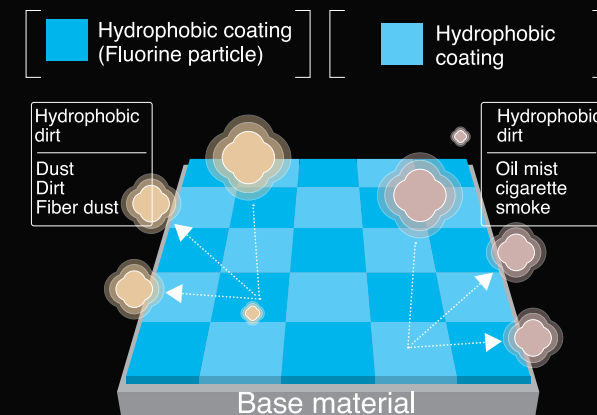

Comparison of Dirt on Fan

[Fan]



Image
after 10 years

Dual Barrier
Coating used

Dirt is generally classified into two groups. Dual Barrier Coating works as two-barrier coating with blended "fluorine particles" that prevent hydrophilic dirt penetration and "hydrophobic particles" that prevent hydrophobic dirt.


Auto Vane Control*

Up and Down / Left and Right


Auto vanes can be moved left and right, and up and down using the remote controller.

*Only for JS18/22VF

Horizontal Airflow/Auto Vane Control

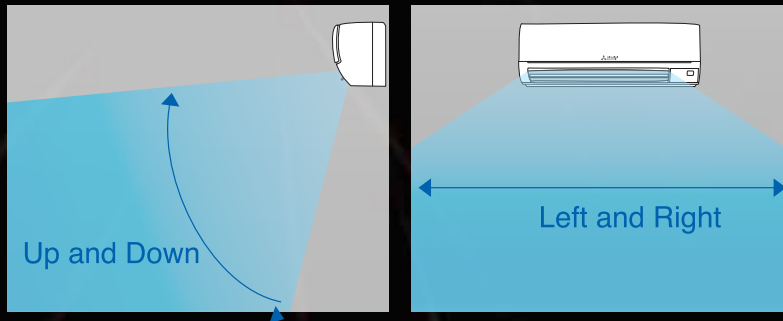


Auto Vane Control Button



Left and Right

Auto vanes can be set at 5 position and swing.



[Swing]

Up and Down


Auto vanes can be set at 5 position and swing.




[Swing]

Useful functions

Sleep mode

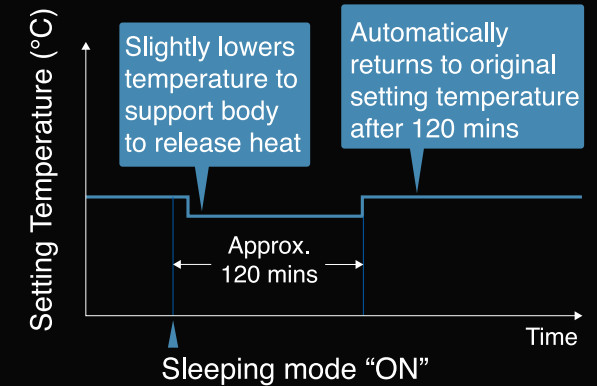

Error code display




Error codes are displayed on the remote controller for troubleshooting

*For details, please refer to the operating instructions



Functions & Features



 Joint Lap DC Motor	 Horizontal vane swing
 Magnetic Flux Vector Sine Wave Drive	 Auto Vane Control Left & Right (*Only for MSY-JS18/22VF)
 Reluctant DC Rotary Compressor	
 Heat Caulking Fixing Method	 Auto Fan Speed Mode
 Vector Wave Eco Inverter	 Long Airflow (*Only for MSY-JS18/22VF)
 PAM (Basic)	 Fast Cooling Mode
 Grooved Piping	 24-Hour On/Off Programmable timer (*Only for MSY-JS18/22VF)
 Anti-Mold Filter	 12-Hour On/Off Timer (*Only for MSY JS13/15VF)
 High Density Filter (Optional part)	 Auto Restart
 Micro Particle Catching Filter (Optional part)	 Sleep Mode
 Electrostatic Anti-allergy Enzyme Filter (Optional part)	 Error Code display on Remote Controller
 DUAL BARRIER COATING (Fan)	 Luminous Button
 Single Coating	 Blue Fin for Outdoor Condenser (Corrosion toughness)

Product Specifications



- Rating Conditions Cooling - Indoor: 27°C (80°F) DB, 19°F (66°F) WB, Outdoor: 35°C (95°F)
- Refrigerant piping length (one-way): 5m (16.4ft)
- Total input based on the indicated voltage (Indoor/Outdoor): 1 phase 230V 50Hz.

Type			Cooling only			
	Indoor Unit		MSY-JS13VF	MSY-JS15VF	MSY-JS18VF	MSY-JS22VF
	Outdoor Unit		MUY-JS13VF	MUY-JS15VF	MUY-JS18VF	MUY-JS22VF
			R32			
Power Supply	Source		Single phase 230V, 50hz			
			Outdoor power supply			
Capacity	Rated (Min-Max)	kW	3.6 (0.9-3.7)	4.2(1.2-4.2)	5.2 (1.5-5.7)	6.6 (1.6-6.7)
	TR	TR	1.00	1.25	1.50	1.9
Total Input	Rated (Min-Max)	kW	1.27(0.30-1.35)	1.44(0.35-1.59)	1.68(0.35-2.04)	2.01(0.34-2.20)
ISEER			4.15	4.23	4.23	4.22
SPL	Indoor Unit Quiet-Lo-Med-Hi-SHi	db(A)	22-28-36-40-43	26-31-37-42-46	26-33-40-44-49	27-37-41-45-51
Air Volume	Indoor Unit Quiet-Lo-Med-Hi-SHi	CFM	190-247-331-397-452	197-274-352-419-471	230-297-392-459-569	300-399-487-576-660
Operating Current	Rated	A	6	6.7	7.5	9.1
Indoor Unit	Dimensions (H x W x D)	mm	280 x 838 x 228	280 x 838 x 228	305 x 923 x 262	305 x 923 x 262
	Weight	kg	8.5	8.5	11.5	12.5
Outdoor Unit	Dimensions (H x W x D)	mm (inches)	538 x 699 x 249	538 x 699 x 249	550 x 800 x 285	714 x 800 x 285
	Weight	kg	21	24.5	31.5	37.0
Ext. Piping	Diameter Liquid	mm (inches)	6.35(1/4)	6.35(1/4)	6.35(1/4)	6.35(1/4)
	Diameter Gas	mm (inches)	9.52(3/8)	9.52(3/8)	12.7(1/2)	12.7(1/2)
	Max. Length Out-In	m	20	20	20	30
	Max. Height Out-In	m	12	12	12	15
Star Rating (2018-2021)			3 Star	3 Star	3 Star	3 Star

Pre Filter			ANTI-MOLD/HIGH DENSITY FILTER (Optional)			
Air Cleaning Filter			ELECTROSTATIC ANTI-ALLERGY ENZYME FILTER (Optional), MICROPARTICLE CATCHING FILTER (Optional)			
Timer			12h	12h	24h	24h
Vertical Swing	Auto		-	-	O	O
	Manual		O	O	-	-
Control Wiring (Copper)	ODU to IDU	Core No. x Sq.mm	4C x 1.0	4C x 1.0	4C x 1.0	4C x 1.0
Power Cable (Copper)	To ODU	Core No. x Sq.mm	3Cx1.0	3C x 1.0	3C x 1.0	3C x 1.0
ODU Breaker Size	To ODU	A	10	10	10	16
Outdoor Guaranteed Operating Range (Min-Max)		°C	21-46	21-46	21-46	21-46

10 YEARS

Adding more years to a comfortable lifestyle

The entire range of Mitsubishi Electric Room Air conditioners
now comes with

WARRANTY UP TO 10 YEARS with NO HIDDEN CHARGES



MSY- JS Series

Indoor Unit



| MSY-JS 13/15VF

H280 x W838 x D228 (mm)

Remote Controller



Luminous
buttons



| MSY-JS 18/22VF

H305 x W923 x D262 (mm)



Luminous
buttons



Outdoor Unit



| MUY-JS 13/15VF

H538 x W699 x D249 (mm)



| MUY-JS 18VF


H550 x W800 x D285 (mm)






| MUY-JS 22VF

H714 x W800 x D285 (mm)

The Perfect Comfort Range

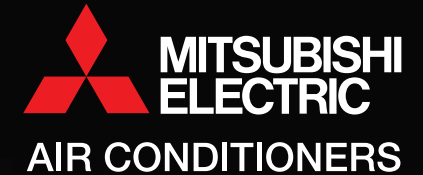



INVERTER RANGE



The ME Edge :

Anti Mold I Nano Platinum Filter I Wide and Long Airflow I Auto Vertical/Horizontal Vane
Power Saving I 100% Imported I Unmatched Service I R32 Refrigerant I Blue Fin Condenser

FIXED SPEED RANGE



*Available in specific models



Air
Curtain



Cassette
Air Conditioner



Ducted
Air Conditioner



Jet Towel




City Multi
VRF



Floor
Standing

Mitsubishi Electric Quality



What is MITSUBISHI ELECTRIC Quality? MEQ represents our dedication to excellence in developing and manufacturing exceptional, eco-friendly home appliances, amazing industrial products, reliable public infrastructure systems and inspiring space technologies, which are truly out of this world. And there's so much more. When you see the MEQ logo, you know something good is being created.

Development

Taking into account the various harsh environments across the world – we at MITSUBISHI ELECTRIC have established uniquely strict quality control standards and various QC tests and Certifications for our entire product range.



Design


To ease our customers' minds we invest great care when designing. So that they may use our products with the reassurance that comes through high-quality parts manufacturing and impeccable assembly.



Production

MITSUBISHI ELECTRIC makes full use of its advanced production technology to efficiently produce top-quality products. All our products are subjected to stringent tests conducted by experienced QC professionals.



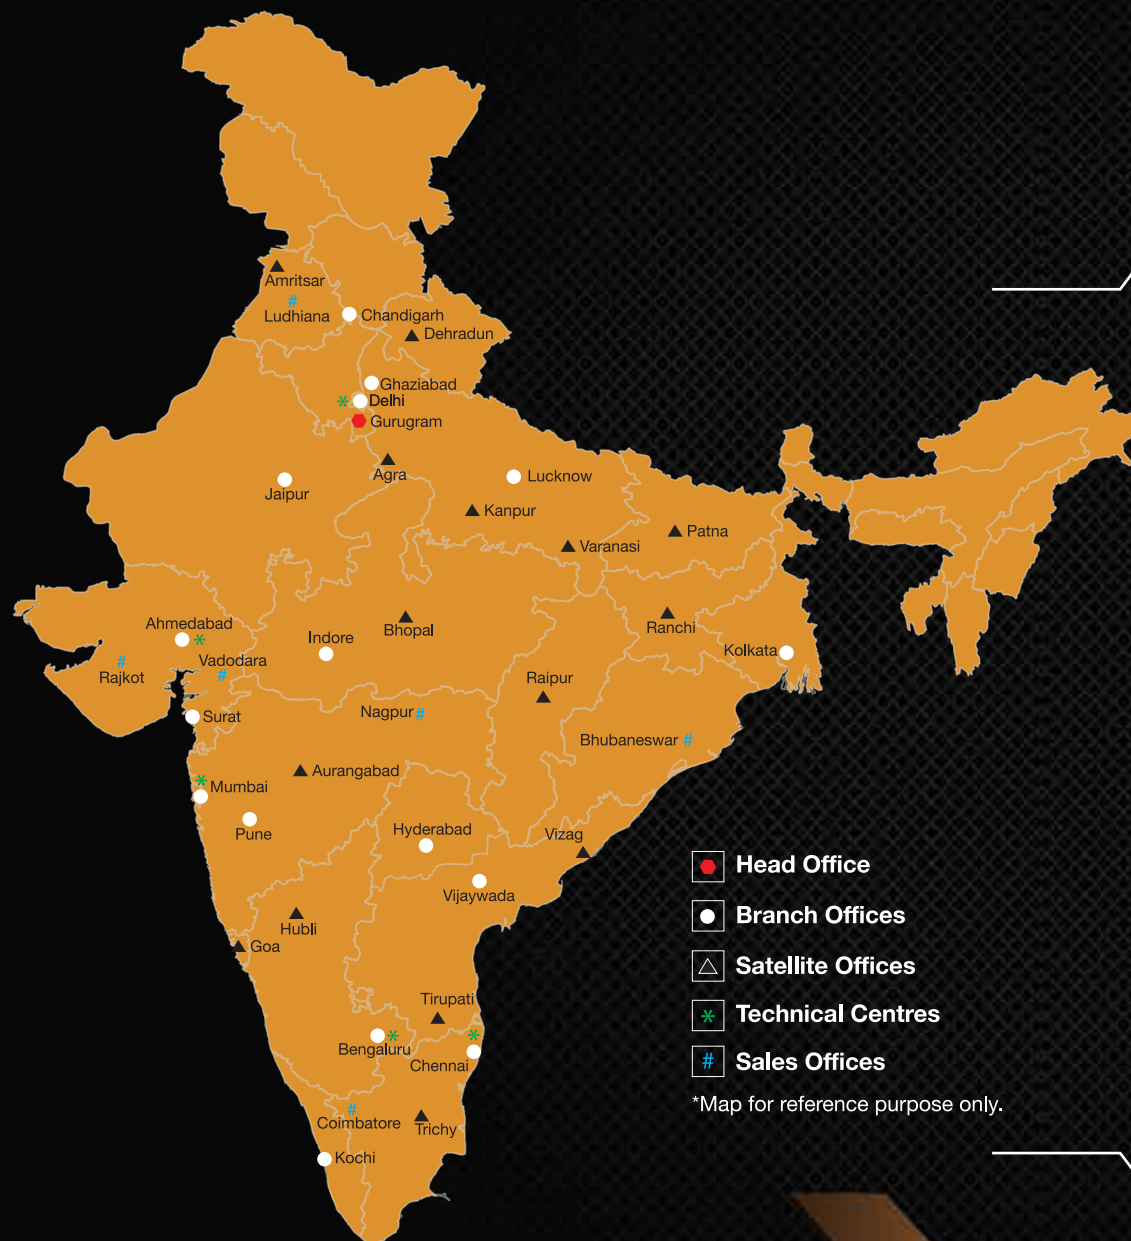

- Head Office**
- Branch Offices**
- Satellite Offices**
- Technical Centres**
- Sales Offices**

*Map for reference purpose only.

MITSUBISHI ELECTRIC INDIA PVT. LTD.

HEAD OFFICE: 3rd Floor, Tower A, Global Gateway,
MG Road, Gurugram – 122002

Tel. No.: (Main): 0124-6739300/ 301

Website: www.MitsubishiElectric.in

Email: customersupport@asia.meap.com

BRANCH/SALES OFFICES: **Ahmedabad:** 079-67777888;
Bhubaneswar: 09073949597; **Bengaluru:** 080-40201600;
Coimbatore: 0422-4385606; **Chandigarh:** 0172-4601645;
Chennai: 044-49232222; **Delhi:** 011-66057900;
Ghaziabad: 011-66057900; **Hyderabad:** 040-43438888;
Indore: 0731-4098991; **Jaipur:** 0141-4011109;
Kolkata: 033-40858800/16-88; **Kochi:** 0484-4862093;
Lucknow: 0522-4002607; **Ludhiana:** 0161-4061654;
Mumbai: 022-66116200; **Nagpur:** 09921442323;
Pune: 09922441773; **Rajkot:** 09586605009; **Surat:** 0261-4003111;
Vadodara: 0265-2314699; **Vijaywada:** 08498894567

SATELLITE OFFICES: **Agra:** 09536900140; **Amritsar:** 09780021037;
Aurangabad: 09552572820; **Bhopal:** 08448398010;
Dehradun: 08800878763; **Goa:** 09167113443; **Hubli:** 08448398010;
Kanpur: 07755007767; **Patna:** 09073949596; **Raipur:** 08448397997;
Ranchi: 0973949598; **Tirupati:** 09319591931; **Trichy:** 09205599022;
Varanasi: 09336311110; **Vizag:** 09205987308

Customer Care Toll Free No.: 1800 102 2626

TECHNICAL CENTRES:

Ahmedabad: 079-67777874; **Bengaluru:** 080-40201600;

Chennai: 044-49232222; **Delhi:** 011-66057900; **Mumbai:** 022-66116200



For E-waste Collection & Disposal process: Customer can get complete details of company process on collection, disposal of e-waste product (i.e. 'Mitsubishi Electric' make Air Conditioner / Printers) and incentive / exchange scheme for returning of e-waste on Company website (www.MitsubishiElectric.in) and / or Toll free number 1800 102 2626.

*Specifications subject to change without prior notice.